


CLASSIC™



ECO-355-375M-60EHC-DGDF

BIFACIAL SOLAR MODULE

M6 166mm

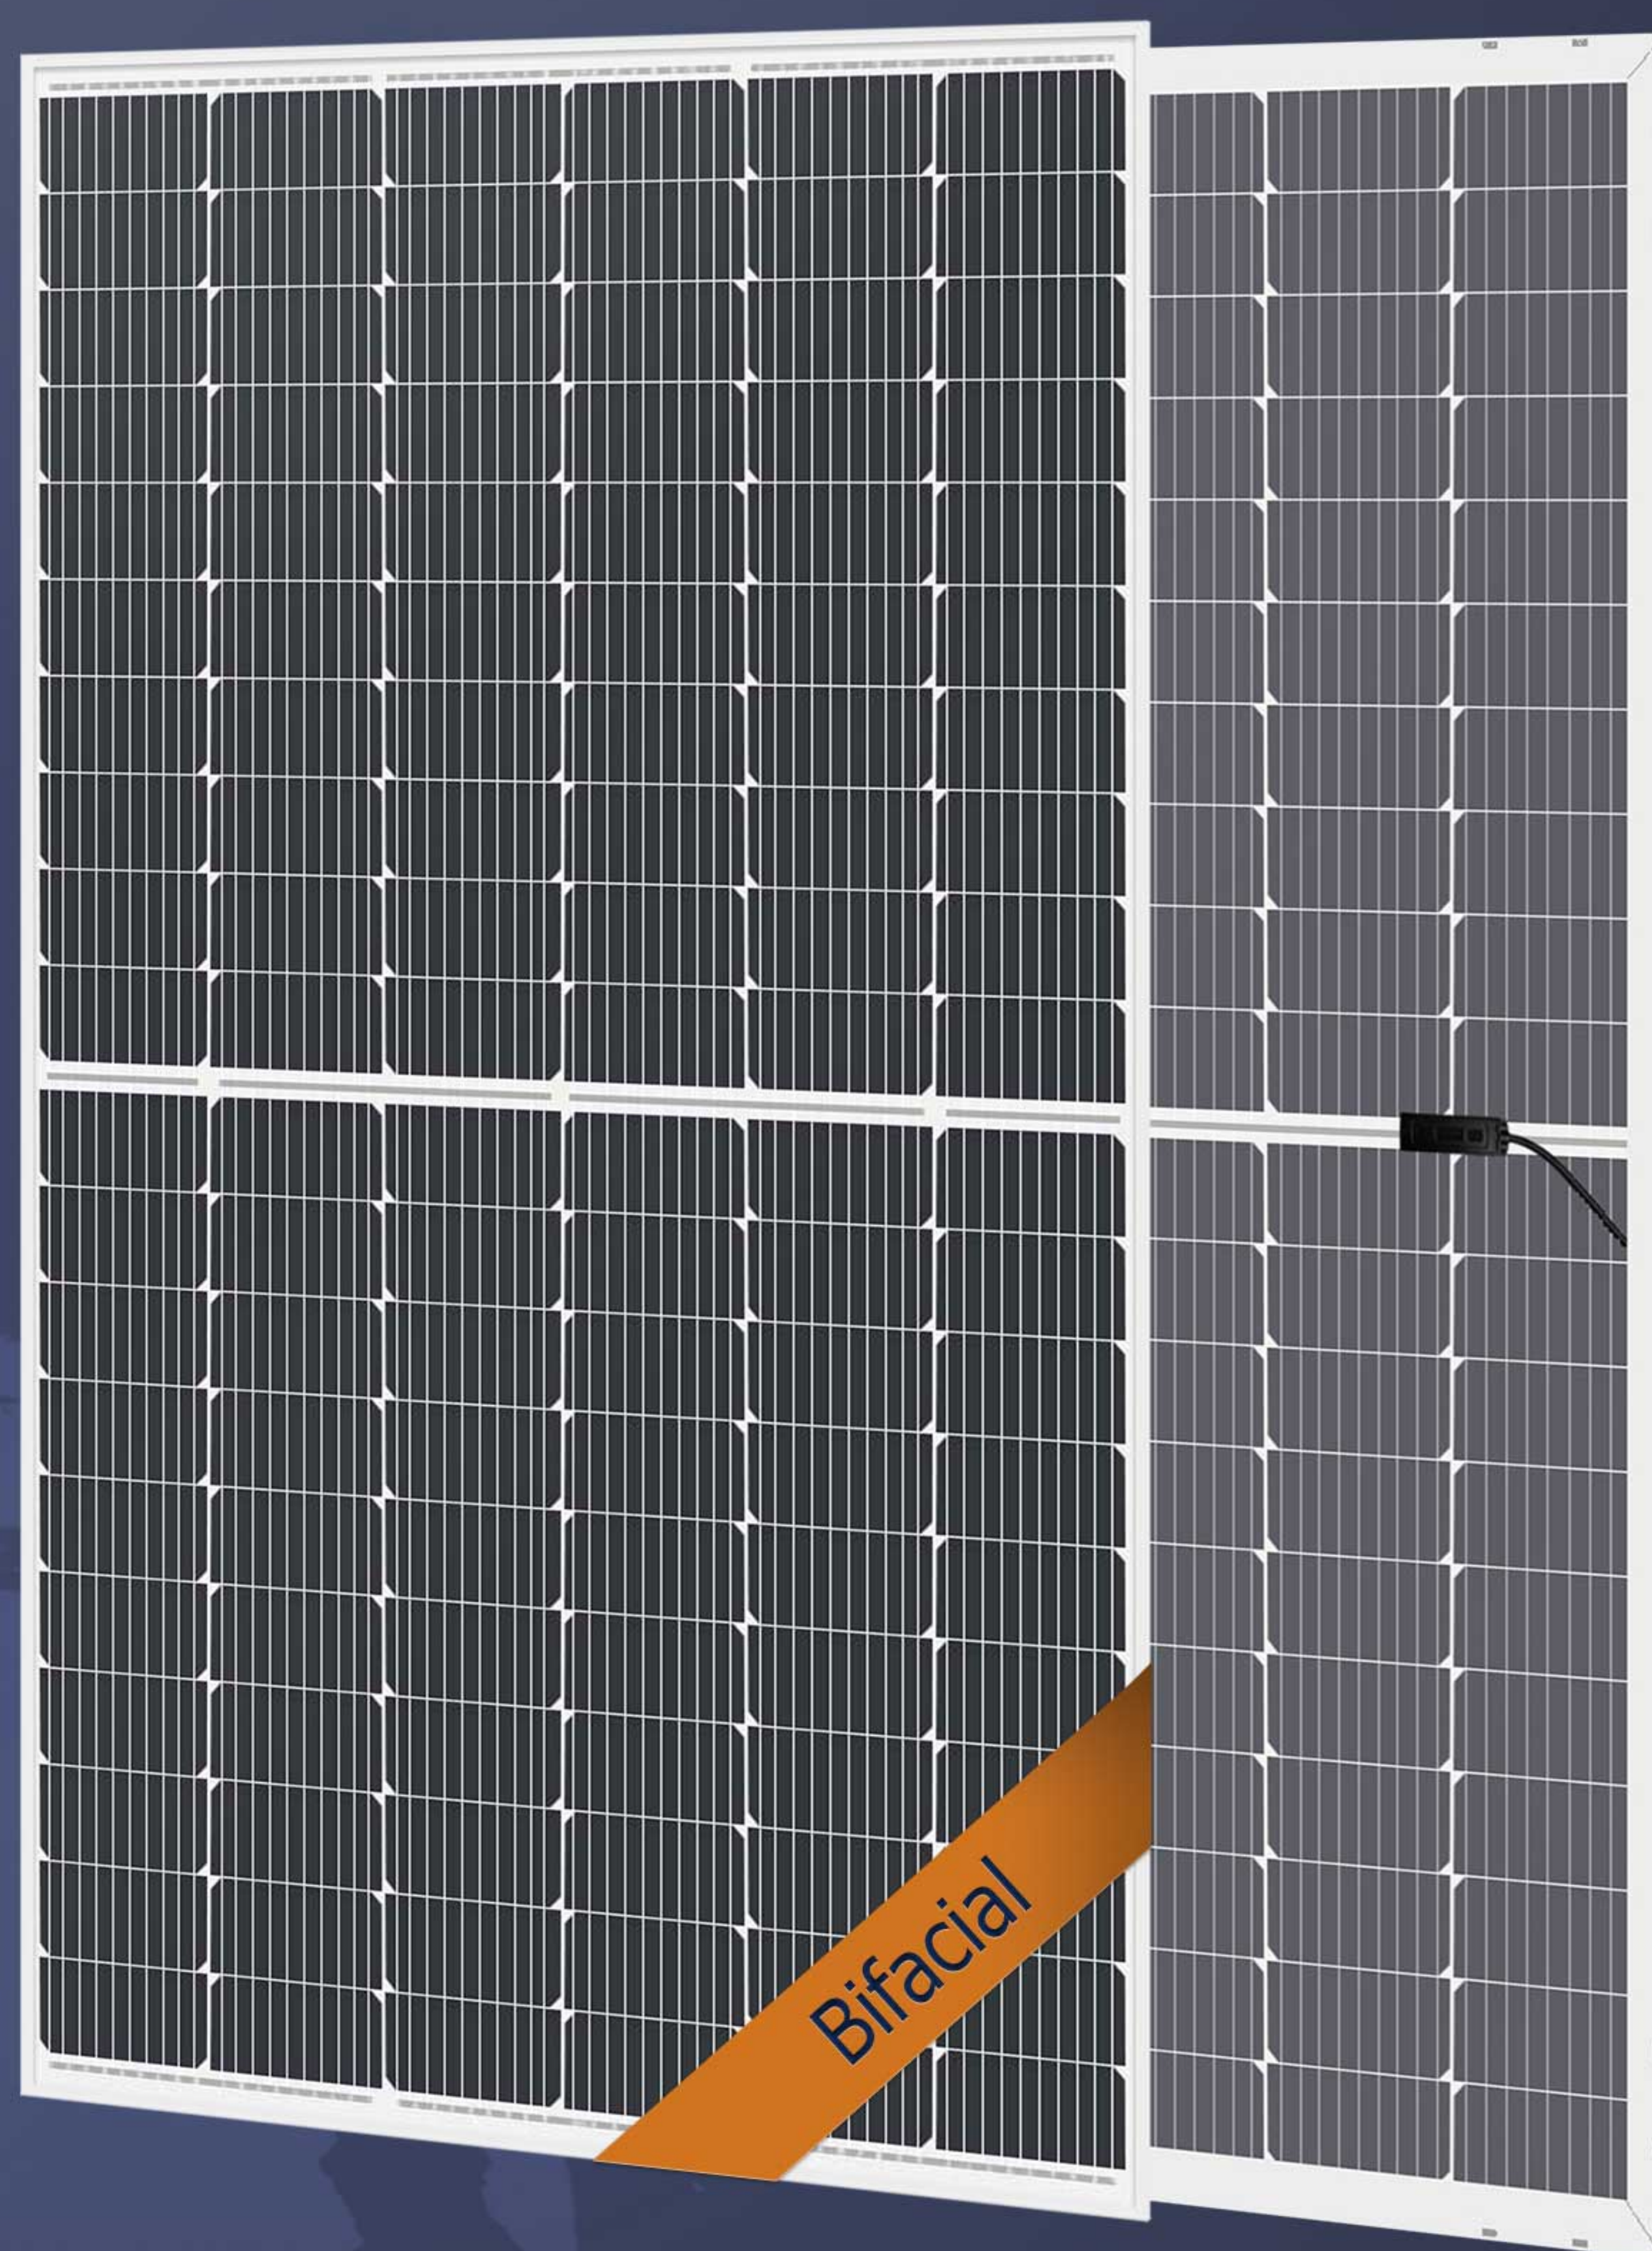

12 YEARS

PRODUCT MATERIAL &
WORKMANSHIP

25 YEARS 84.8%

LINEAR PERFORMANCE

WARRANTY

INNOVATIONAL

MBB AND
HALF-CUT CELLS
TECHNOLOGY

REDUCE

INTERNAL LOSS
REDUCE
SHADOW LOSS

MATURE

PERC CELL
TECHNOLOGY
EXCELLENT CELL

EFFICIENCY AND OUTPUT

PASSED THREE

TIMES IEC

STANDARD TEST

PASSED HAIL

TEST (ICE BALL
SIZE : d=45mm)

ECO DELTA 9BB Mono Big Cell(166) Half-cut Cell
Double-glass-bifacial PV Module



ECO-355-375M-60EHC-DGDF

ELECTRICAL DATA @ STC		ECO-355M-60 EHC-DGDF	ECO-360M-60 EHC-DGDF	ECO-365M-60 EHC-DGDF	ECO-370M-60 EHC-DGDF	ECO-375M-60 EHC-DGDF
Peak Power(Pmax)	(W)	355	360	365	370	375
Maximum Power Voltage (Vmp)	(V)	33.88	34.06	34.28	34.49	34.70
Maximum Power Current(Imp)	(A)	10.48	10.57	10.65	10.73	10.81
Open-circuit Voltage (Voc)	(V)	40.71	40.93	41.11	41.33	41.54
Short-circuit Current(Isc)	(A)	10.98	11.06	11.14	11.22	11.30
Module Efficiency	(%)	19.48	19.76	20.04	20.31	20.58
Operating Temperature		-40°C~+85°C				
Maximum System Voltage		□ 1000V □ 1500V				
Maximum Series Fuse Rating		20A				
Power Telorance		0~+3%				

*STC (Standard Test Condition): Irradiance 1000W/ m² , Module Temperature 25°C, AM 1.5

ELECTRICAL DATA @ NMOT		ECO-355M-60 EHC-DGDF	ECO-360M-60 EHC-DGDF	ECO-365M-60 EHC-DGDF	ECO-370M-60 EHC-DGDF	ECO-375M-60 EHC-DGDF
Peak Power(Pmax)	(W)	263	266	270	274	278
MPP Voltage (Vmp)	(V)	31.13	31.23	31.47	31.68	31.92
MPP Current(Imp)	(A)	8.45	8.52	8.58	8.65	8.71
Open Circuit Voltage (Voc)	(V)	37.41	37.53	37.74	37.96	38.21
Short Circuit Current(Isc)	(A)	8.85	8.91	8.98	9.05	9.11

*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m² , Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax	-0.35%/k
Temperature coefficient of Voc	-0.25%/k
Temperature coefficient of Isc	0.04%/k
NMOT	43±2°C

MECHANICAL DATA

Cell Type	Mono-Crystalline, 166*83mm
Cell Arrangement	120pcs (2 (6×10))
Dimension (L×W×H)	1755 x 1038 x 30 mm
Weight	22kg
Front Cover	2mm Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 3 Bypass Diodes
Cable Type	4mm²
Length of Cable	1000mm
Connector	PV Connector

OPTIONAL


Frame	□ Black
Backsheet	□ 2mm Transparent Glass
Connector	□ Original MC4
Cable	□ 300mm □ 1000mm
Module Size	□ Customized

PACKING MANNER

Packing Type	40'HQ
Piece/Pallet	36
Piece/Container	936

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, ECO DELTA POWER CO., LTD Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the produccets described herein.

Current-Voltage Curve under different irradiance

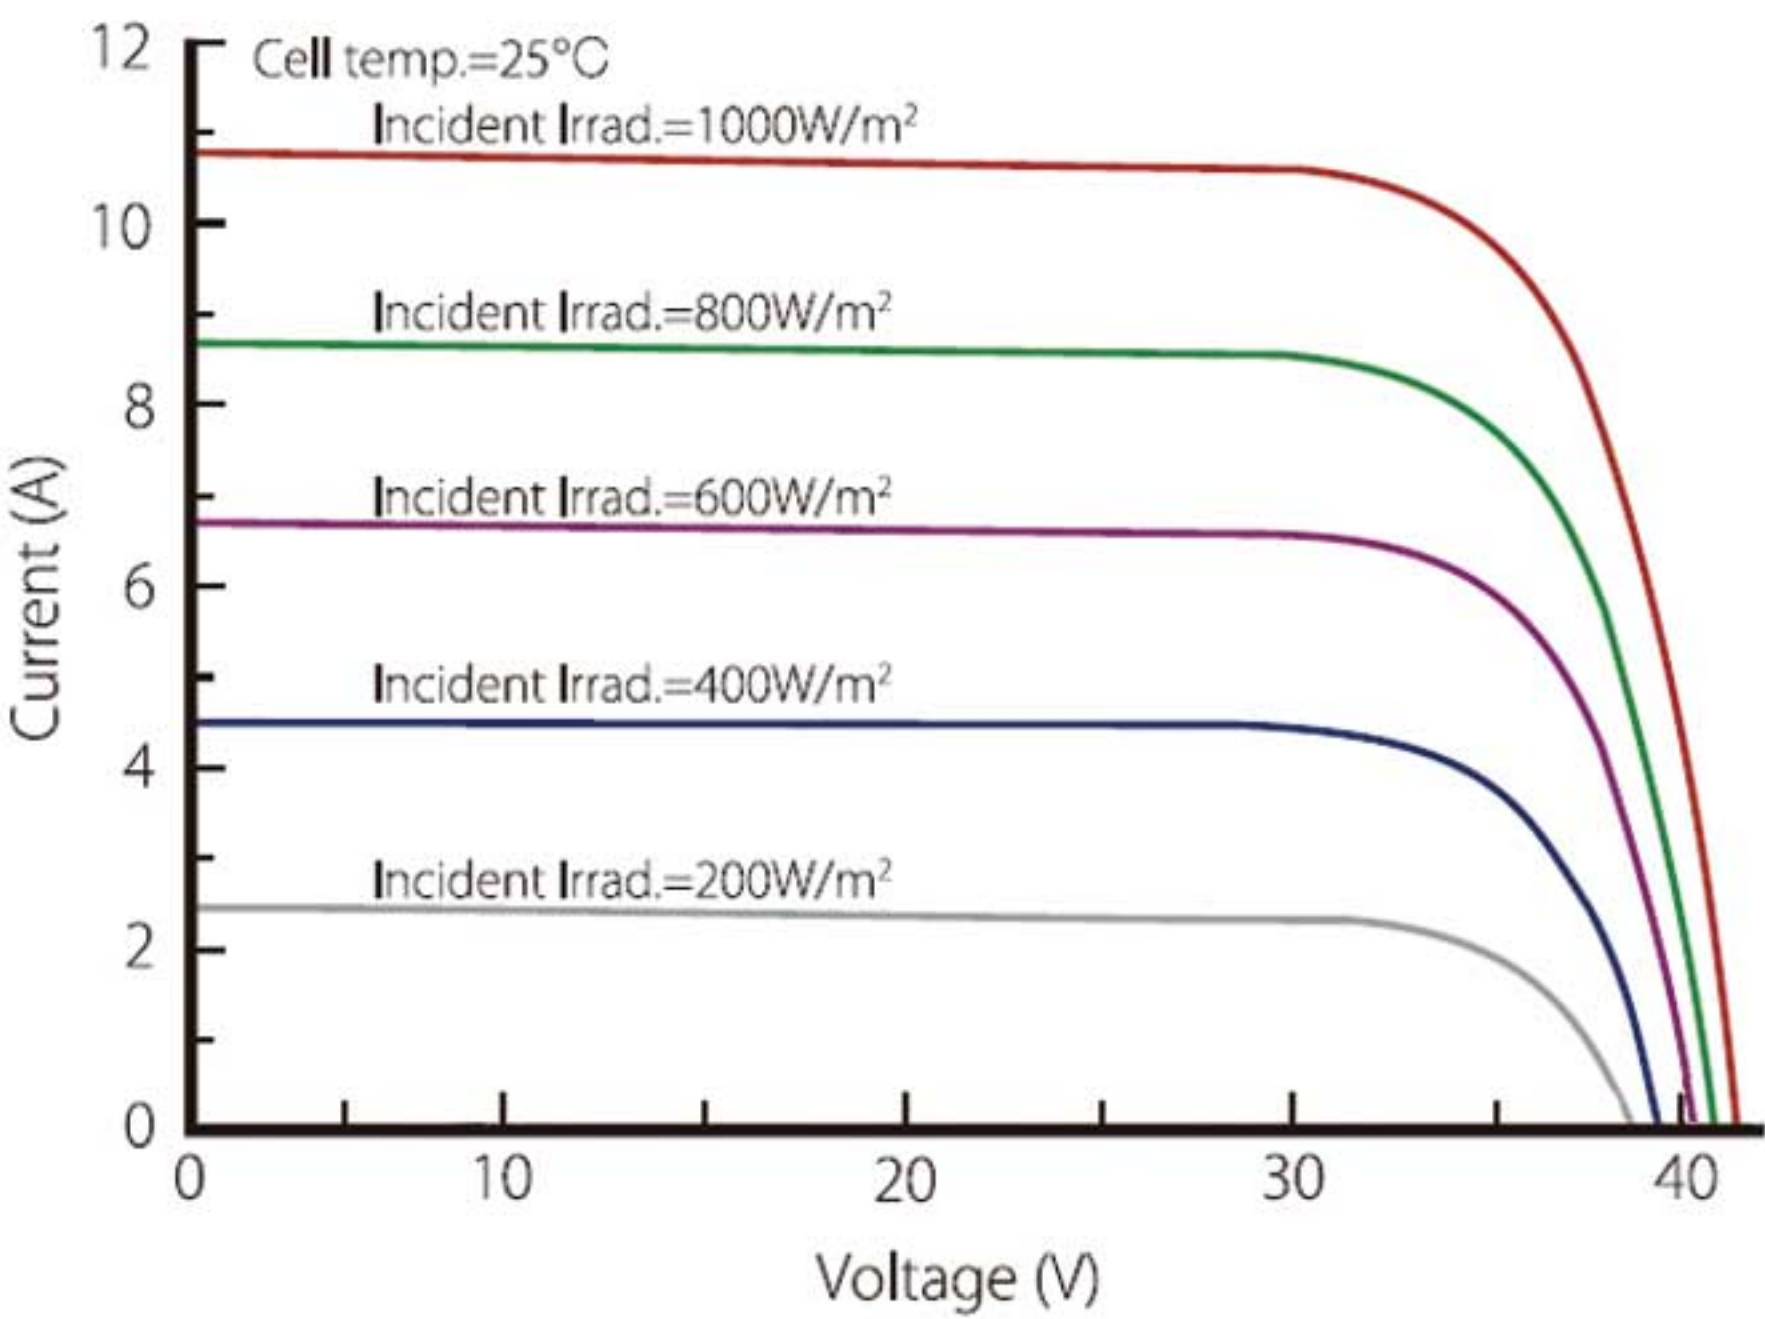

Current-Voltage Curve under different working temperatures

